

## ALUSTEP 500


### Panel's composition

**SKINS IN GLASSFIBER FABRIC** impregnated with epoxy resin - Thickness mm: 0,5

**CORE** (for more information see data sheet)  
 Aluminium honeycomb (Alloy 3003/3104)  
 with hexagonal cells  
**Diameter:** Ø1/4, Ø3/8  
**Density:** from 50 to 70 micron



**Standard dimensions**  
 Dimension tolerance  $\pm 30$ mm





## POLISTEP (on request)

**SKINS IN GLASSFIBER FABRIC** impregnated with epoxy resin - Thickness mm: 0,5

**CORE** (for more information see data sheet)  
 Polypropylene honeycomb




**Standard dimensions**  
 Dimension tolerance  $\pm 30$ mm

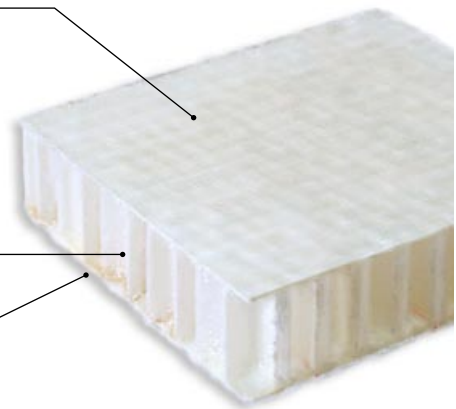

## PVC-STEP (on request)

**SKINS IN GLASSFIBER FABRIC** impregnated with epoxy resin - Thickness mm: 0,5

**CORE** (for more information see data sheet)  
 PVC foam  
**Density:** from 50 to 60 kg/m<sup>3</sup>

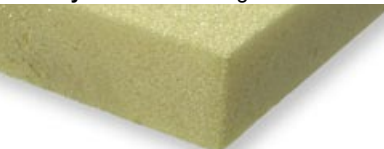

**Standard dimensions**  
 Dimension tolerance  $\pm 30$ mm

